

SLIDING DOOR WELCOME PACK

IMPORTANT INFORMATION



A close-up, high-angle photograph of a sliding door track mechanism. The track is dark, possibly black or dark grey, and features a central channel with a sliding component. A silver-colored keyhole is visible on the right side of the track. The lighting is dramatic, highlighting the metallic and plastic textures of the hardware.

origin

DOORS AND WINDOWS

THANK YOU FOR
CHOOSING THE ORIGIN
SLIDING DOOR

Welcome to Origin...

Origin is the UK's leading manufacturer of aluminium architectural solutions.

Now award-winning and operating internationally, Origin began in 2002 as a family company dedicated to the design, creation and manufacture of the UK's best quality doors, backed by uncompromising levels of service.

Cousins, Neil Ginger and Victoria Brocklesby, have since worked relentlessly to perfect the design and functionality of bi-folding doors, and to create and maintain the highly respected reputation for quality and service that they have today, while expanding the range to include Entrance Doors, Internal Doors, Sliding Doors and Windows.

As the business has continued to grow and diversify, the foundations of family ethos, pride and ownership in all stages of production firmly remain.

Thank you for choosing Origin.

Neil

NEIL GINGER CEO

Victoria

VICTORIA BROCKLESBY COO



DOWNLOAD YOUR
GUARANTEE
CERTIFICATE



origin

DOORS AND WINDOWS




SLIDING DOOR
OPERATING INSTRUCTIONS



Opening the Doors...

1. Insert the key into the lock, turn it 360° and remove
2. Flip the handle up to disengage the locks
3. Open the now unlocked door by sliding it across in the opening direction
4. Depending on your configuration, to open the remaining doors, slide each door in same direction as you did with the lead door, until all doors are open or stage them where you want

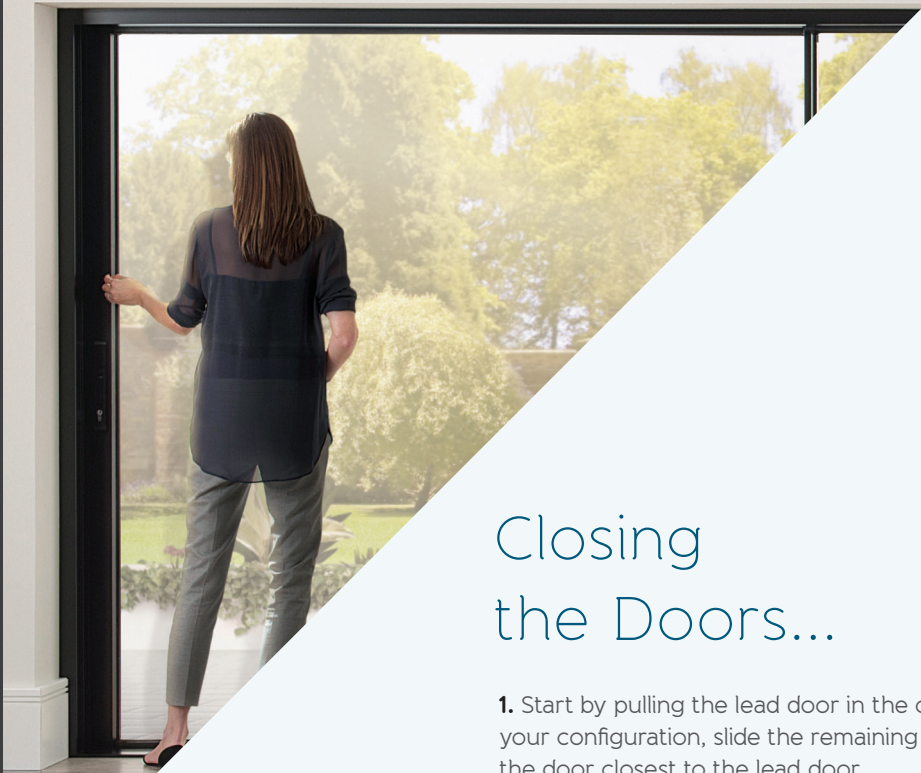

Closing the Doors...

- 1.** Start by pulling the lead door in the closing direction, and depending on your configuration, slide the remaining doors in the same direction, starting with the door closest to the lead door
- 2.** Once all doors are closed, engage the locks by flipping down the handle
- 3.** Once the locks are engaged, lock the doors by turning the key 360° anti-clockwise

Opening the Doors...

1. Insert the key into the lock, turn it 360° and remove
2. Turn the thumb-turn 90° to disengage the locks - depending on your configuration, repeat steps one and two to unlock and disengage all locks
3. Open the now unlocked door by sliding it across in the opening direction
4. Depending on your configuration, to open the remaining doors, slide each door in same direction as you did with the lead door, until all doors are open or stage them where you want





Closing the Doors...

- 1.** Start by pulling the lead door in the closing direction, and depending on your configuration, slide the remaining doors in the same direction, starting with the door closest to the lead door
- 2.** Once all doors are closed, engage the locks by turning the thumb-turn until the doors are engaged
- 3.** Once the locks are engaged, lock the doors by turning the key 360° anti-clockwise



Helpful Hints and Tips:

Safety recommendations when handling and using the doors.

Danger of being caught

Pay attention to the possibility of being caught between the frame and the door while they're being operated

Danger of falling

An open door poses a risk of people tripping or falling: ensure you supervise children when the doors are open

Maintenance Instructions...

Your Origin Door contains a mechanical locking mechanism that will need to be lubricated periodically.

Lubricate using silicone spray or grease and wipe away any excess with a non-abrasive cloth.



Routine Care of your Origin Doors...

Powder coated aluminium profile

Use a light, soapy solution (such as a diluted baby bath product) and non-abrasive cloth to wipe dirt from the doors and glass. Washing up liquid is not recommended, and do not use solvent based cleaning products. Please also refrain from using an abrasive cloth such as a scouring pad as the doors and glass can be scratched.

If you are in a marine environment, the doors and hardware should be washed down on a weekly basis with fresh water as it is common for harmful deposits to build up.

Before beginning any maintenance or construction work close to the doors and glass, it should be protected from dirt which can be originated from the site. Use plastics and weather-stripping as required.

Seals

Use a light, soapy solution and non-abrasive cloth to gently clean these. Do not use solvent based cleaning products on the seals.

Tracks


Use a small brush to loosen any debris from the track. Using a suitable vacuum cleaner with a thin attachment, vacuum up the debris in the track. Do not allow debris to build up in the track as this will affect the operation.



origin

If you would like any aspect of the door operation explaining to you,
please call or email a member of the team using the details below.

t 0808 168 5816 e enquiry@origin-global.com w origin-global.com

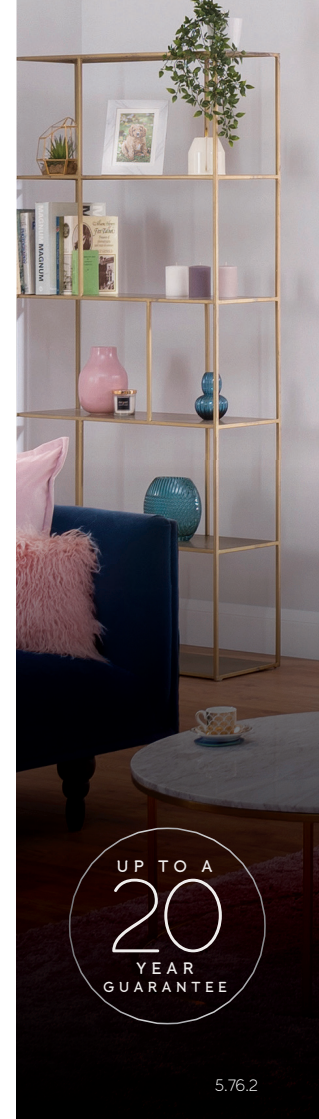

A close-up photograph of a window's internal mechanism. The focus is on a vertical black frame with several silver-colored metal components, including a roller and a track. The background is a blurred view of a bright outdoor scene with greenery and water. In the foreground, a portion of a wooden surface with a natural grain pattern is visible.

origin

DOORS AND WINDOWS

IF SOMETHING'S NOT RIGHT...

Contact your installer
in the event of
any problem...

**We hope your life has been transformed following
the installation of your Origin Home.**

Rest assured - as you have chosen Origin, you can relax
knowing you're in safe hands.

If, however, you encounter any problems, please contact
your installer and they will work with us to rectify any
difficulties you may be experiencing.

 ORIGINFRAMESUK  @ORIGINBIFOLDS  @ORIGINBIFOLDS
 ORIGIN GLOBAL  ORIGIN_GLOBAL

origin

18.19.5

